


PERFORMANCE CHART at 2900 min⁻¹ (according to ISO 9906 grade 2)

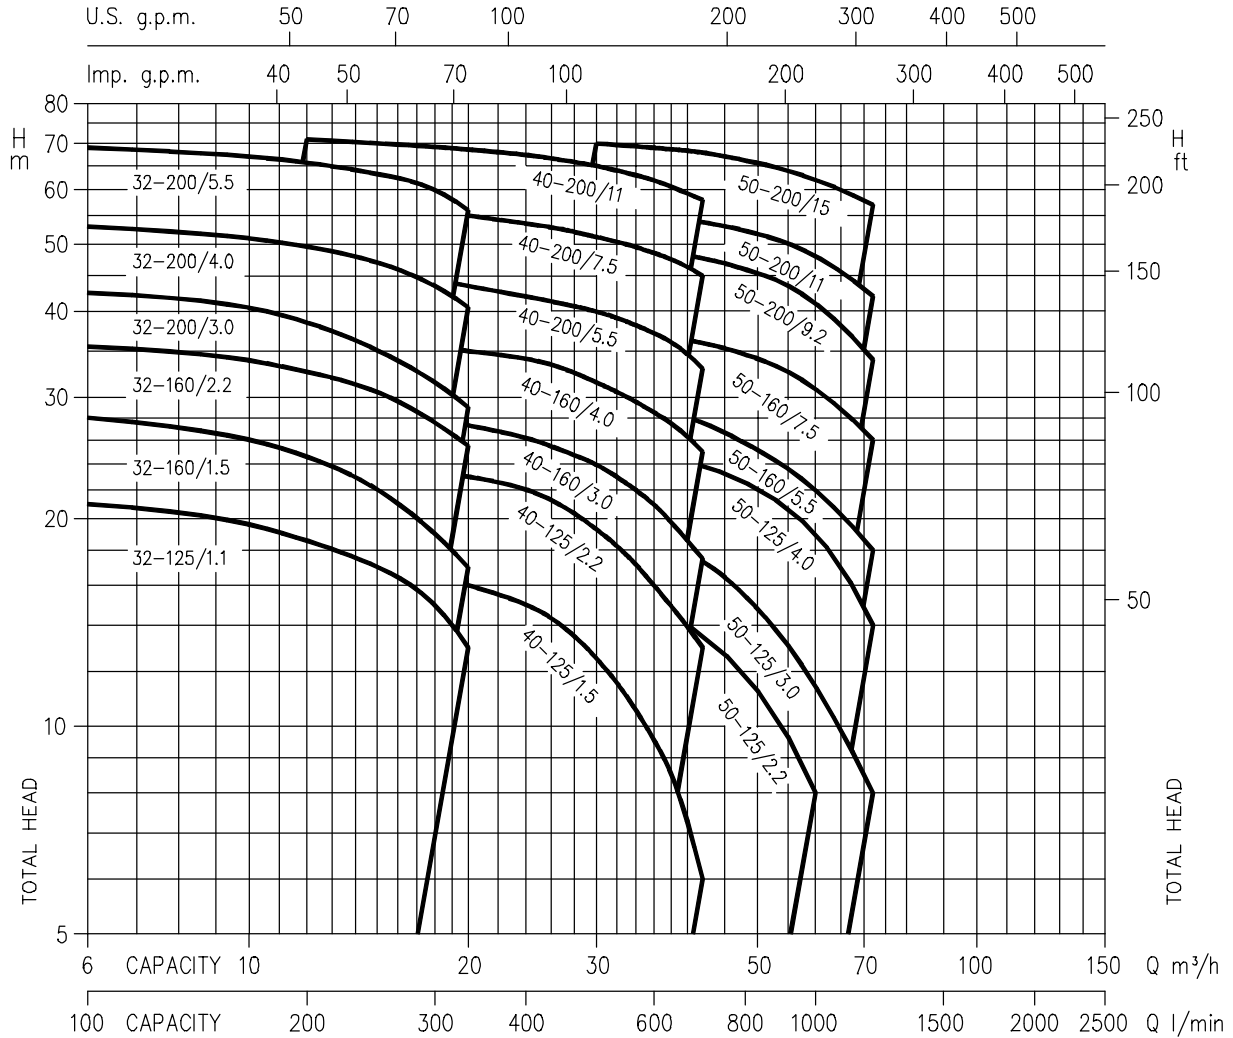

PERFORMANCE TABLE

Pump type 3M	kW	Absorbed Current (A)			Q=Capacity l/min m³/h	H=Total head															
		230V	Three-phase			100	150	200	250	300	333	400	450	500	550	600	650	700	800	1000	1200
			400V	690V		6	9	12	15	18	20	24	27	30	33	36	39	42	48	60	72
32-125/1.1	1.1	5.0	2.9	-	21	20	18.5	17	15	13	-	-	-	-	-	-	-	-	-		
32-160/1.5	1.5	5.9	3.4	-	28	26.5	24.5	22	19	17	-	-	-	-	-	-	-	-	-		
32-160/2.2	2.2	8.3	4.8	-	35.5	34.5	32.5	30.5	27.5	25.5	-	-	-	-	-	-	-	-	-		
32-200/3.0	3.0	11.8	6.8	-	42.5	41	38.5	35	31.5	29	-	-	-	-	-	-	-	-	-		
32-200/4.0	4.0	15.6	9.0	-	53	51.5	49.5	47	43.5	40.5	-	-	-	-	-	-	-	-	-		
32-200/5.5	5.5	-	11.8	6.8	69	67.6	65.5	63	60	56	-	-	-	-	-	-	-	-	-		
40-125/1.5	1.5	5.9	3.4	-	-	-	18	17.5	17	16	15	14	12.5	11	9.5	8	6	-	-		
40-125/2.2	2.2	8.3	4.8	-	-	-	26	25	24.2	23	22	21	19	17.5	16	14.3	13	-	-		
40-160/3.0	3.0	11.8	6.8	-	-	-	30	29	28.5	27.3	26.2	25.4	24	22.5	21	19.2	17.5	-	-		
40-160/4.0	4.0	15.9	9.2	-	-	-	38	37	36	35	34	33	31.3	30	28.5	27	25	-	-		
40-200/5.5	5.5	-	11.1	6.4	-	-	46	45	44	43.5	42	41	40	38.5	37	35.1	33	-	-		
40-200/7.5	7.5	-	15.1	8.7	-	-	56.5	56	55.3	55	53.5	52.5	51.2	49.8	48.5	47	45	-	-		
40-200/11	11	-	20.0	11.6	-	-	71	70	69.3	68.8	67.5	66.2	65	63.5	62	60	58	-	-		
50-125/2.2	2.2	8.3	4.8	-	-	-	-	-	-	-	17	16.6	16.1	15.5	14.9	14.2	13.4	11.8	8		
50-125/3.0	3.0	11.8	6.8	-	-	-	-	-	-	-	20.5	20	19.5	19	18.5	18	17.3	15.5	12.3		
50-125/4.0	4.0	15.9	9.2	-	-	-	-	-	-	-	26	25.9	25.7	25.3	24.7	24.2	23.3	22.2	19		
50-160/5.5	5.5	-	11.5	6.6	-	-	-	-	-	-	31	30.5	30	29.5	29	28	27.6	26	22.5		
50-160/7.5	7.5	-	15.5	9.0	-	-	-	-	-	-	39	38.5	38	37.5	37	36.5	36	34.5	31		
50-200/9.2	9.2	-	17.4	10.0	-	-	-	-	-	-	-	-	50	49.5	49	48.4	47.5	46	41		
50-200/11	11	-	22.0	12.7	-	-	-	-	-	-	-	-	56	55.5	55	54.5	53.8	52	48		
50-200/15	15	-	31.3	18.0	-	-	-	-	-	-	-	-	70	69.5	69	68.5	68	66	62		