

# Pumps for circulation of above ground swimming pools

## Basic



### Applications

Recirculation of small portable pools and aquariums.

### Materials

#### Pump Body

Glass loaded polypropylene.

#### Impeller

Glass loaded Noryl.

#### Motor Shaft

Stainless steel. AISI 420.

#### Mechanical Seal

Graphite and alumine.

### Motor

Classe F insulation.


IP 55 Protection.

Continuous operation.


Built-in thermal protection.

### Equipment

Suction and discharge tails to suit  
32 - 38 mm diameter flexible pipes.

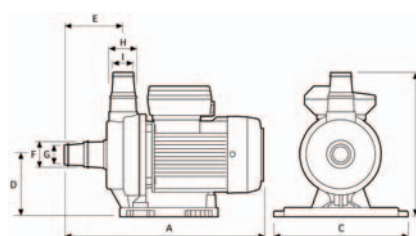

	A	B	C	D	E	F	G	H	I	Kg
Basic	305	219	204	94	90	38	32	38	32	4.5

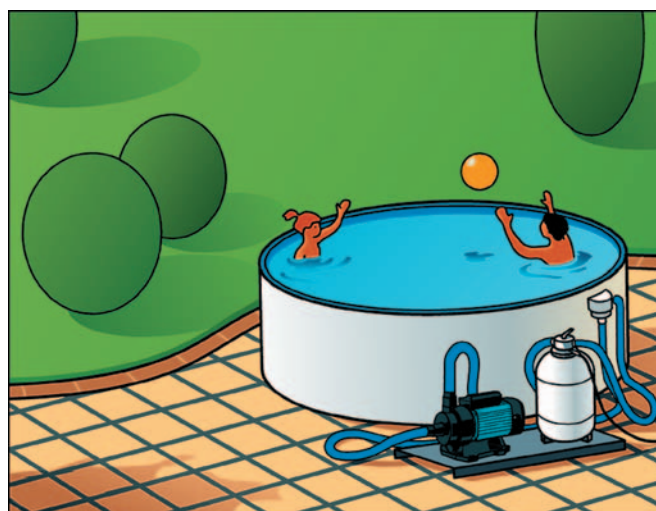

Single phase	Price	A			P1 (kW)		kW	HP	µF	Flow [m³/h]	Manometric head [m]							
		1~ 230 V	3~ 230 V 400 V		1~	3~					2	2,5	3	3,5	4	4,5	5	5,5
Basic	175	1.4	-	-	0.24	-	0.15	0.2	6	5.8	5	4.3	3.5	3.2	2.5	1.6	0.8	

Reversed Table