


## PERFORMANCE CURVES (according to ISO 9906 grade 2)

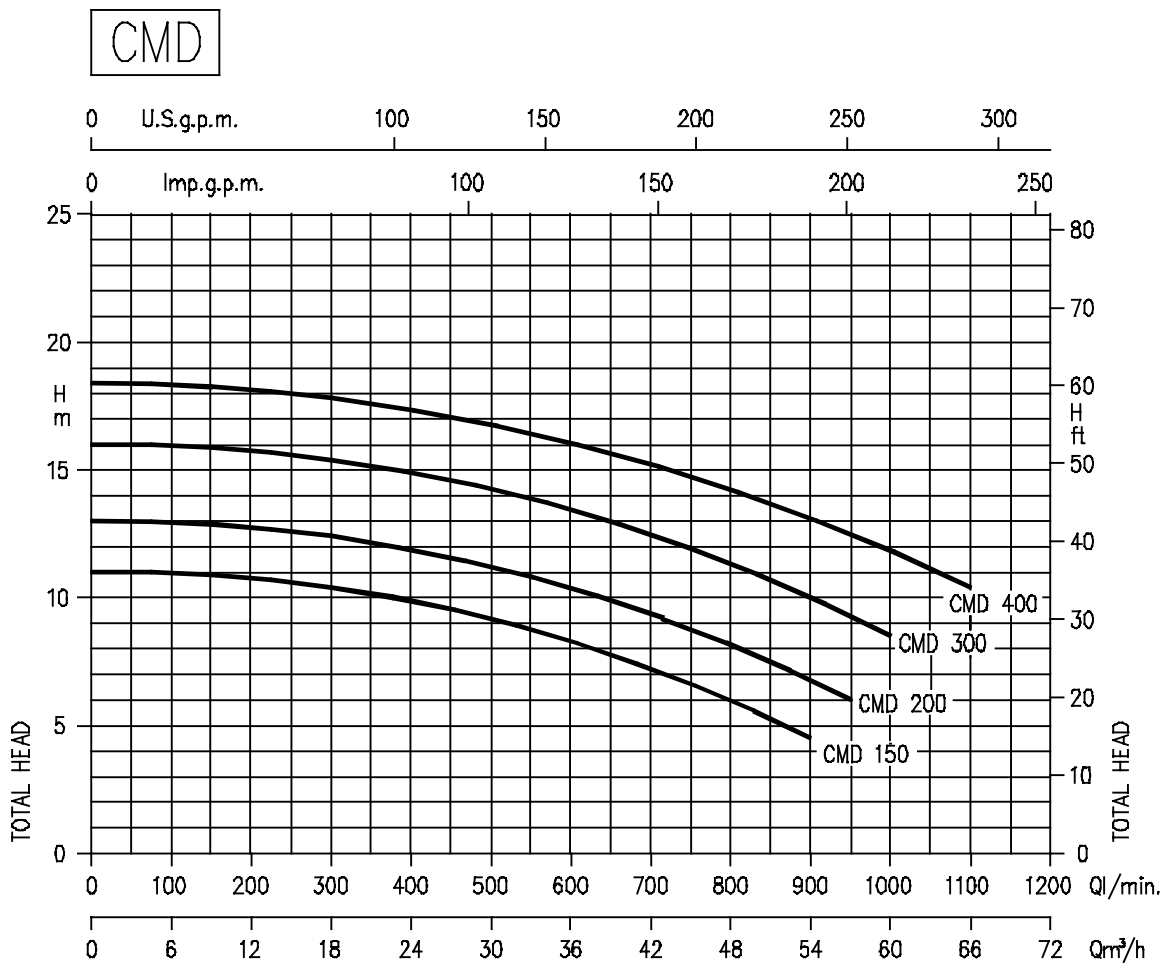

## PERFORMANCE TABLE

Pump type		kW	Capacitor		Absorbed Current (A)			l/min m³/h	Q=Capacity							
Single-phase 230V 50Hz	Three-phase 230/400V 50Hz		µF	V <sub>c</sub>	Single-phase	Three-phase 230V 400V			300	400	600	800	900	950	1000	1100
CMD 1.50 M	CMD 1.50 T	1,1	31,5	450	8,9	5,9	3,4	18	24	36	48	54	57	60	66	
CMD 2.00 M	CMD 2.00 T	1,5	40	450	10,8	7,5	4,3	10,4	9,9	8,4	6	4,5	-	-	-	
-	CMD 3.00 T	2,2	-	-	-	9,0	5,2	12,4	11,9	10,5	8,3	6,8	6	-	-	
-	CMD 4.00 T	3,0	-	-	-	12,3	7,1	15,4	14,9	13,5	11,4	10	9,3	8,5	-	
								17,8	17,3	16,1	14,2	13,1	12,5	11,8	10,4	