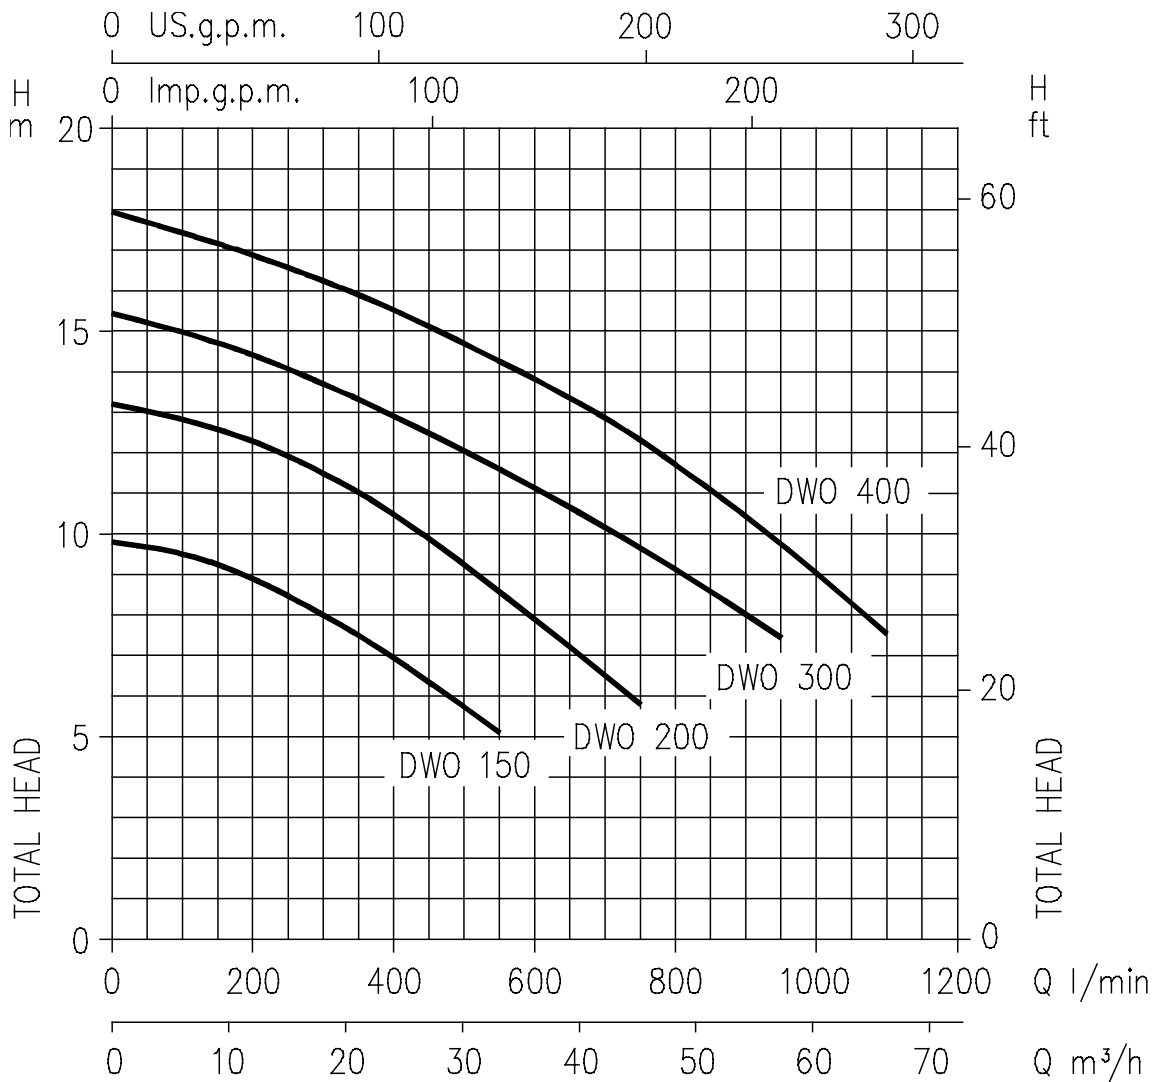


PERFORMANCE CURVES (according to ISO 9906 grade 2)

PERFORMANCE TABLE

Pump type		kW	Capacitor		Absorbed Current (A)			l/min m³/h	Q=Capacity							
Single-phase 230V 50Hz	Three-phase 230/400V 50Hz		µF	V _c	Single-phase	Three-phase 230V	400V		100	200	300	400	550	750	950	1100
DWO 150 M	DWO 150	1,1	31,5	450	6,8	4,4	2,5	6	12	18	24	33	42	57	66	
DWO 200 M	DWO 200	1,5	40	450	9,0	6,1	3,5	9,5	12,3	11,5	6,9	5,1	-	-	-	
-	DWO 300	2,2	-	-	-	8,3	4,8	12,7	14,5	13,8	10,5	8,6	5,8	-	-	
-	DWO 400	3,0	-	-	-	11,0	6,4	15	17,5	16,3	12,9	11,7	9,7	7,5	-	
								H=Total head								
								17,5	16,9	16,3	15,6	14,3	12,4	9,8	7,6	