



Applications

ESPA Pressurisation equipment automatically controls the pressure in a sealed system, delivering water at a pre-determined pressure.


Once the system has been filled the unit will take over and maintain the optimum system conditions.

Should a loss of water occur in the system, for any reason, the built-in pressure sensor will detect the drop in pressure and automatically start the pump restoring the system to the original cold fill pressure.



ES1000 (shown here with Prisma 15 pump, but standard version is with PAB 15/Per 50 pump).

Model	Voltage	FLC each pump	Kw	Outlet size	CPF max	Price
ES1000	230v 1/50Hz	2.1 Amps	0.37	15mm	2.8 Bar	663
ZHLPS2	High/low pressure switch kit (on copper manifold)					104

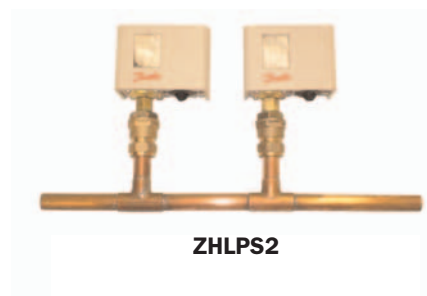

Dimensions

Model	Length	Width	Height
ES1000	600	550	450