


### Performance Data For GG Series Pump

#### Model GG250I



Iron Construction

Standard Clearance



3" Std. Port Size

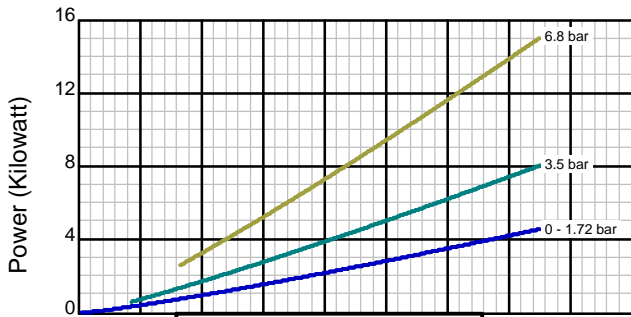



Viscosity: 1 cst

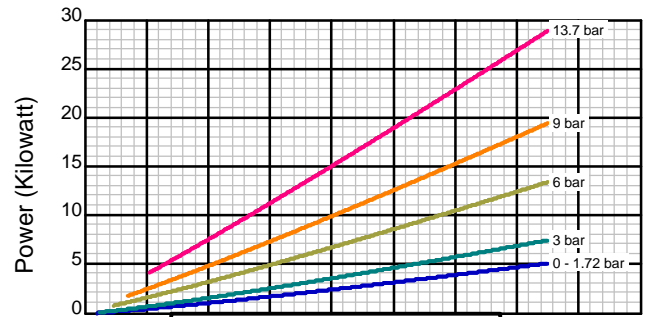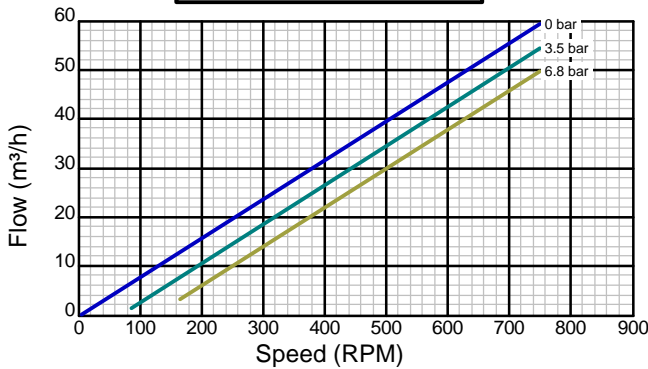


Viscosity: 21 cst

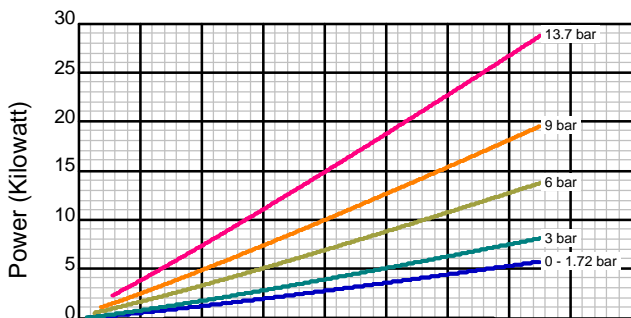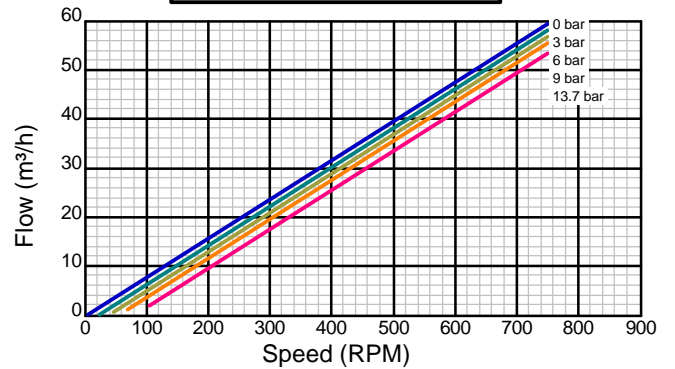

Viscosity: 50 cst

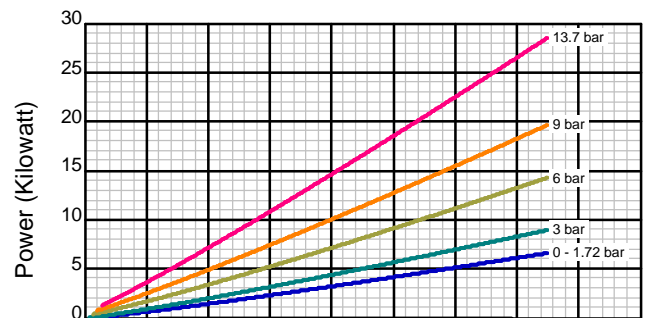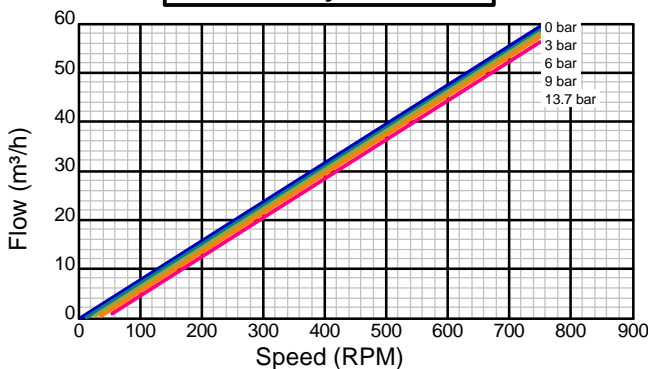

Viscosity: 150 cst

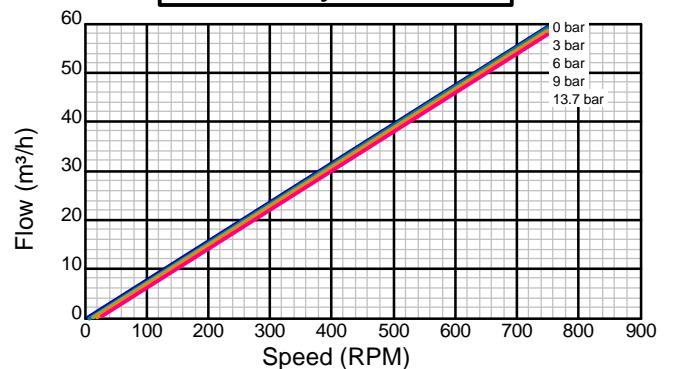

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Version 2.3.A.6

Created on  
January 24, 2003









### Performance Data For GG Series Pump

#### Model GG250I

Iron Construction

Standard Clearance

3" Std. Port Size

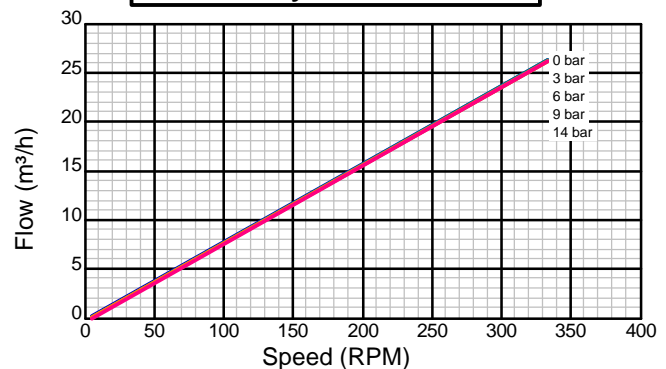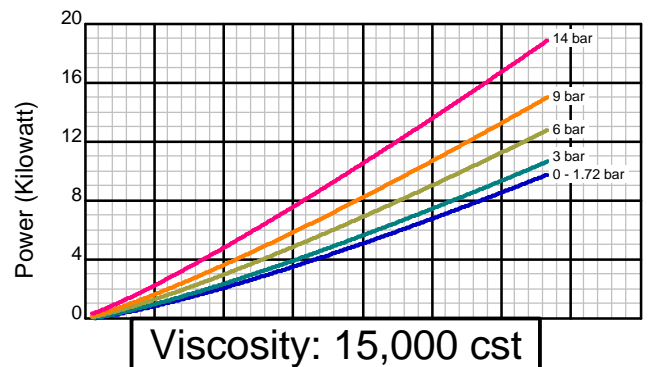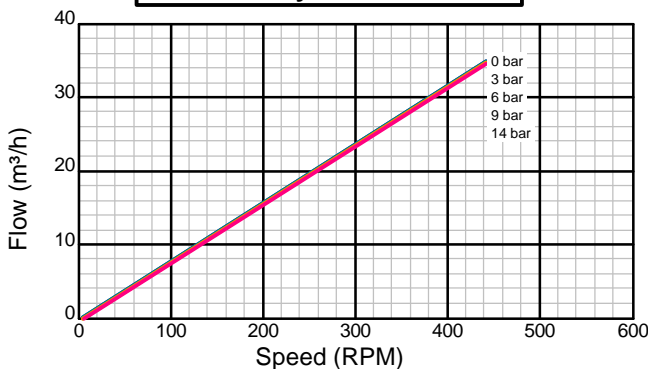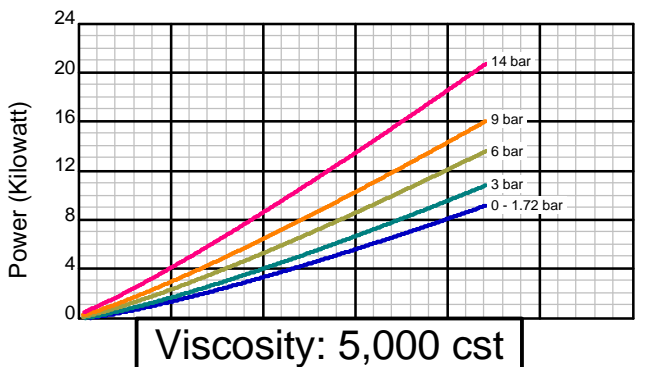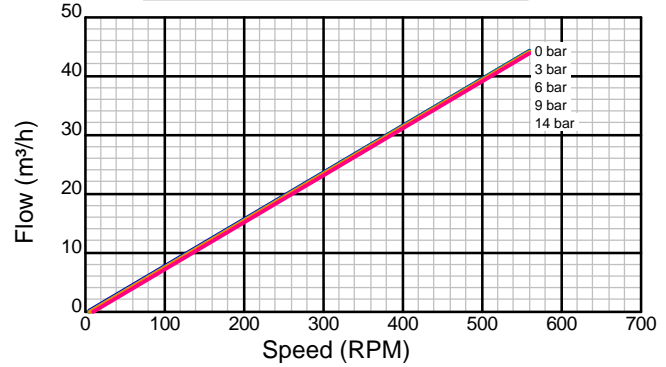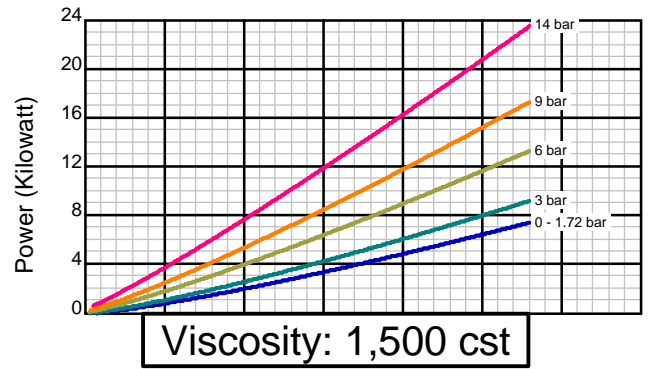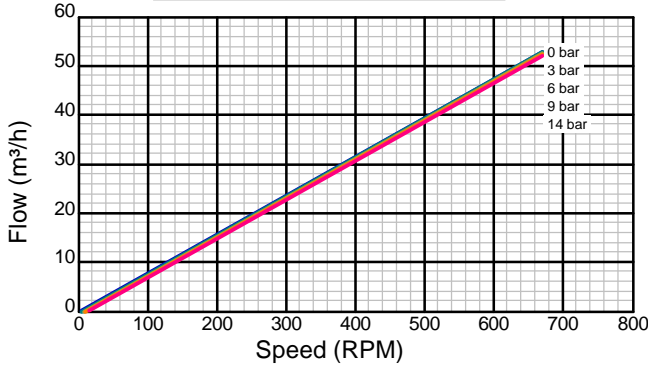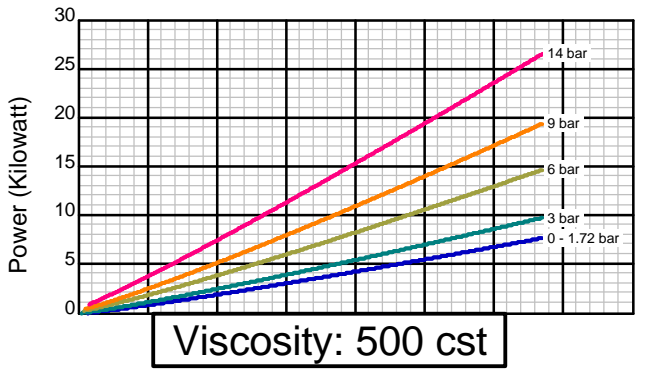

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Version 2.3.A.6

 Created on  
 January 24, 2003



12500 South Pulaski Road  
 Alsip, Illinois USA 60803  
 Tel 708 389-2500 Fax 708 388-0869  
 email: tuthillpump@tuthill.com  
 www.tuthill.com

FlowPro Value Stream  
 Tuthill Pump Group  
 12500 South Pulaski Road  
 Alsip, Illinois 60803  
 USA  
 Phone: 708-389-2500  
 Fax: 708-389-4166  
 tuthillpump@tuthill.com  
 www.tuthillpump.com


### Performance Data For GG Series Pump

#### Model GG250I


Iron Construction

Standard Clearance


3" Std. Port Size

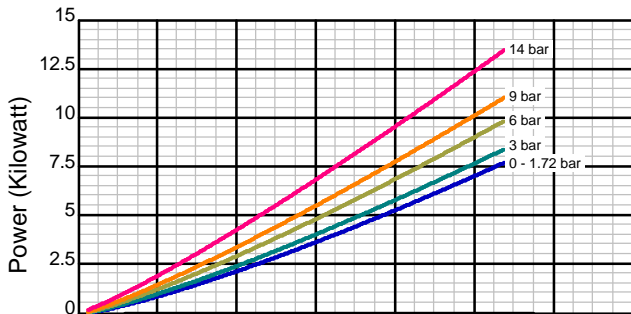

Viscosity: 50,000 cst

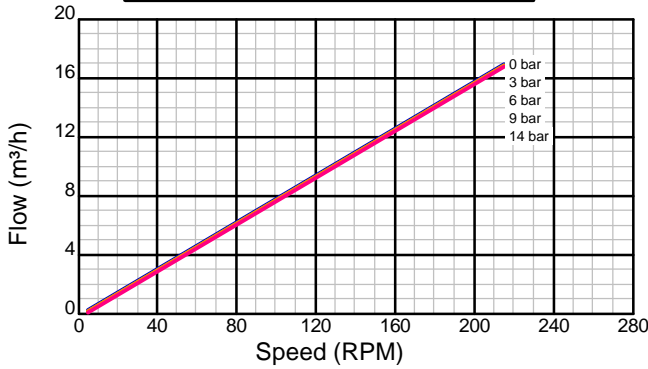

Viscosity: 150,000 cst

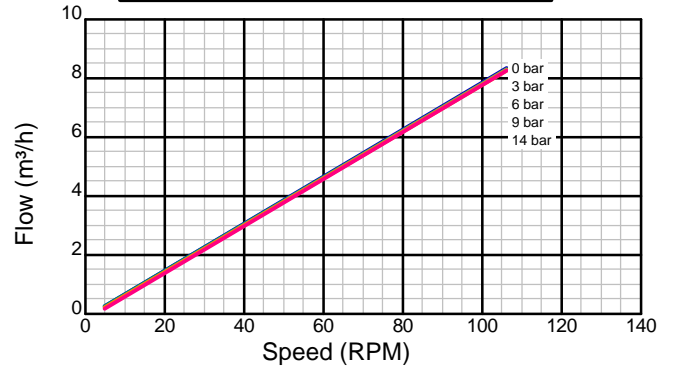

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Version 2.3.A.6  
 Created on  
 January 24, 2003









### Performance Data For GG Series Pump

#### Model GG250S

Stainless Steel Construction

Standard Clearance

3" Std. Port Size

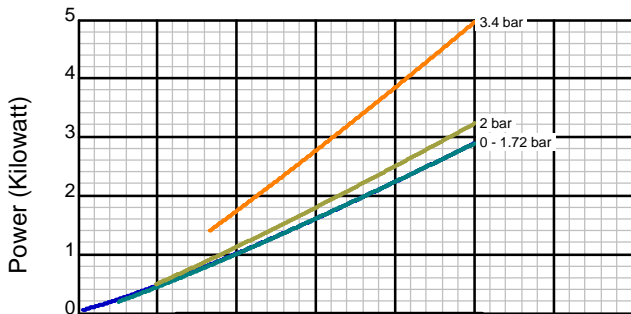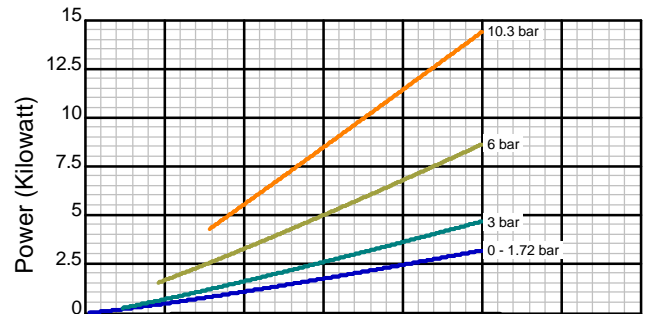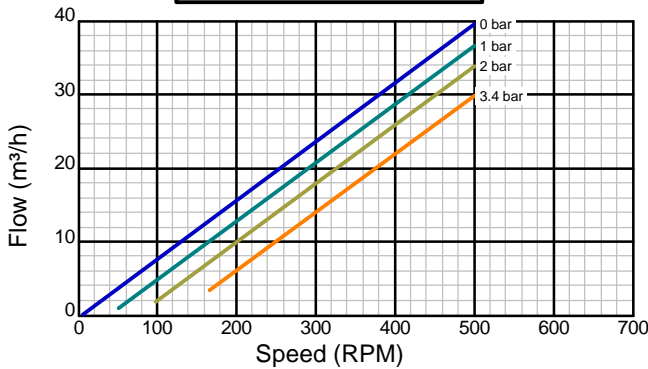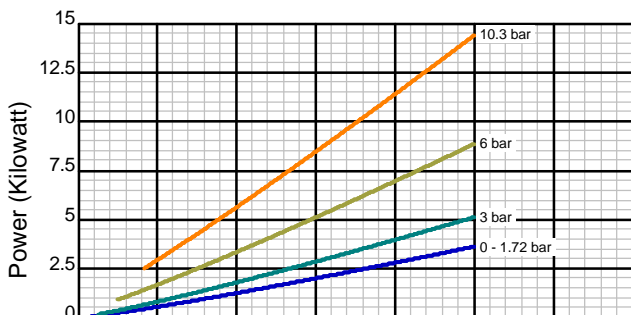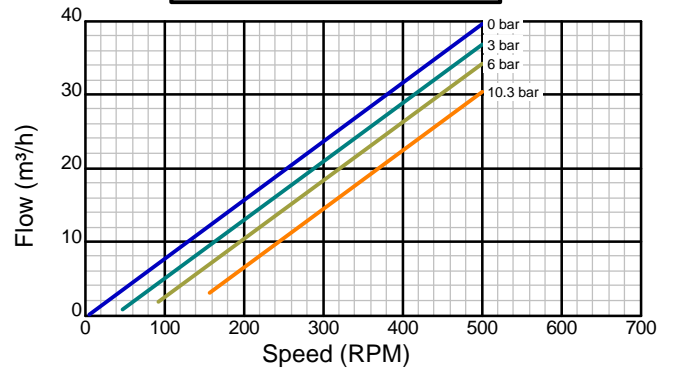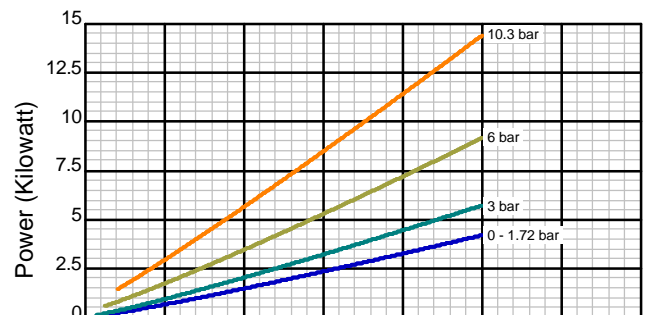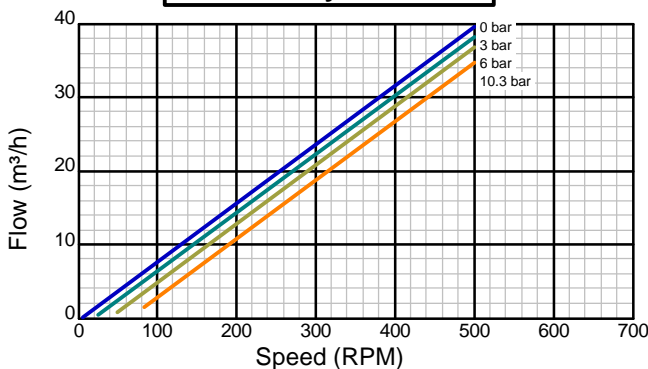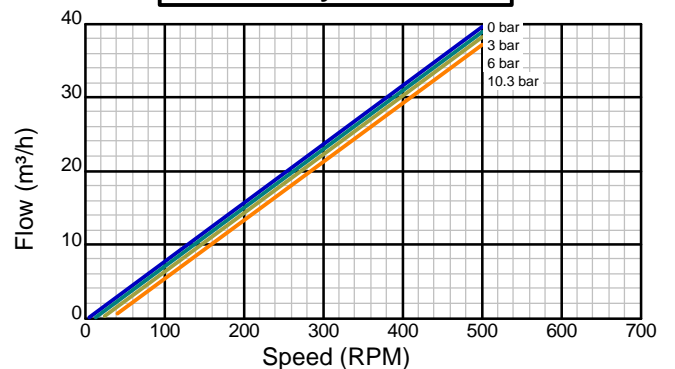
**Viscosity: 1 cst**

**Viscosity: 21 cst**

**Viscosity: 50 cst**

**Viscosity: 150 cst**


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Version 2.3.A.6

 Created on  
 January 24, 2003



12500 South Pulaski Road  
 Alsip, Illinois USA 60803  
 Tel 708 389-2500 Fax 708 388-0869  
 email: tuthillpump@tuthill.com  
 www.tuthill.com

FlowPro Value Stream  
 Tuthill Pump Group  
 12500 South Pulaski Road  
 Alsip, Illinois 60803  
 USA  
 Phone: 708-389-2500  
 Fax: 708-389-4166  
 tuthillpump@tuthill.com  
 www.tuthillpump.com


### Performance Data For GG Series Pump

#### Model GG250S



Stainless Steel Construction

Standard Clearance



3" Std. Port Size

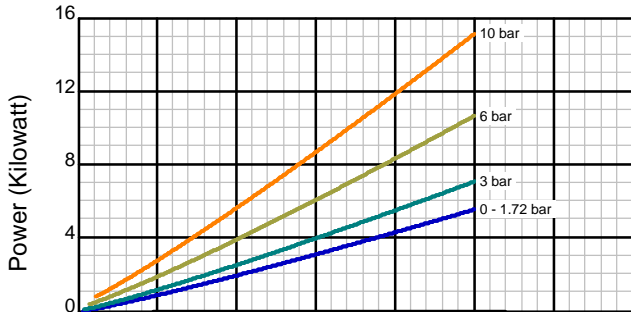



Viscosity: 500 cst

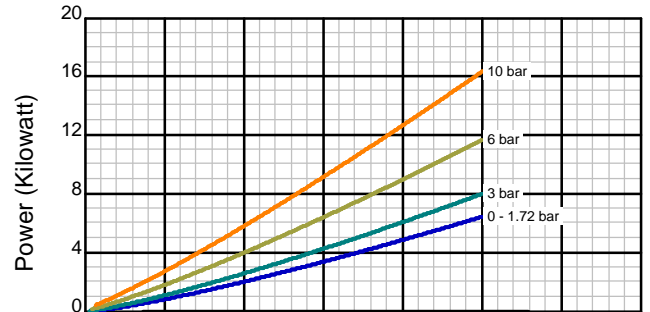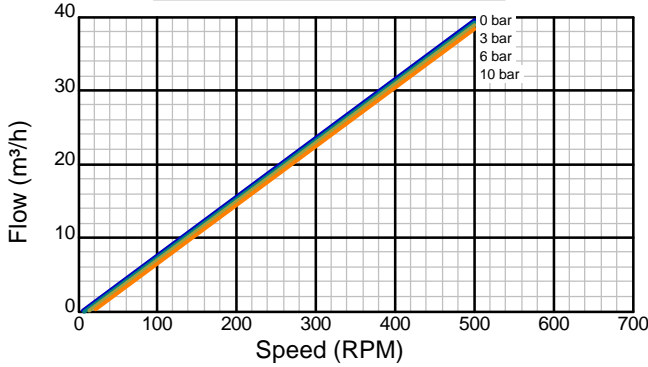


Viscosity: 1,500 cst

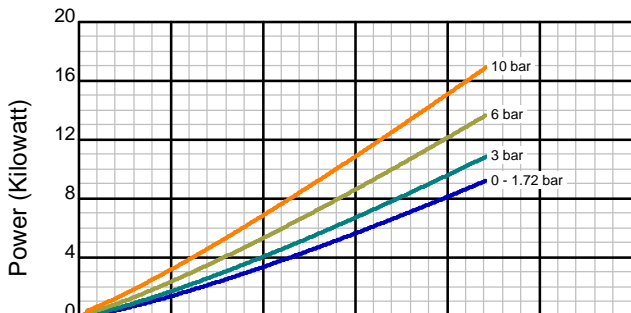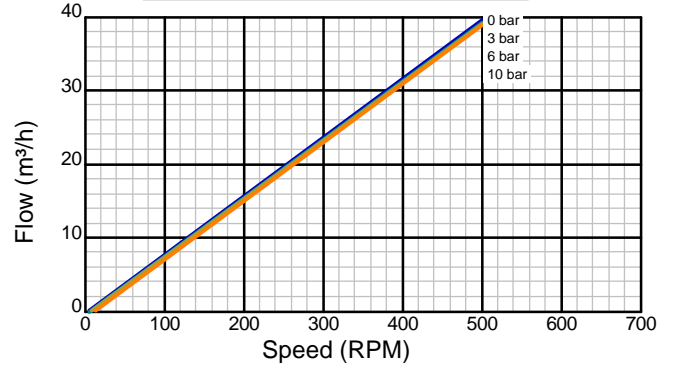

Viscosity: 5,000 cst

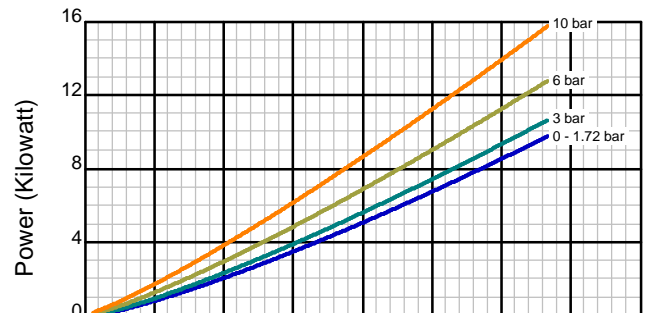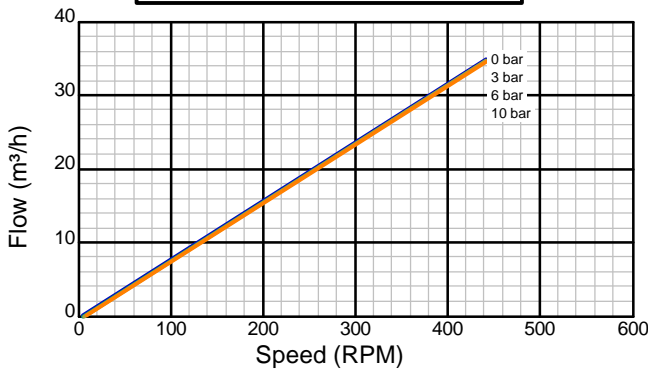

Viscosity: 15,000 cst

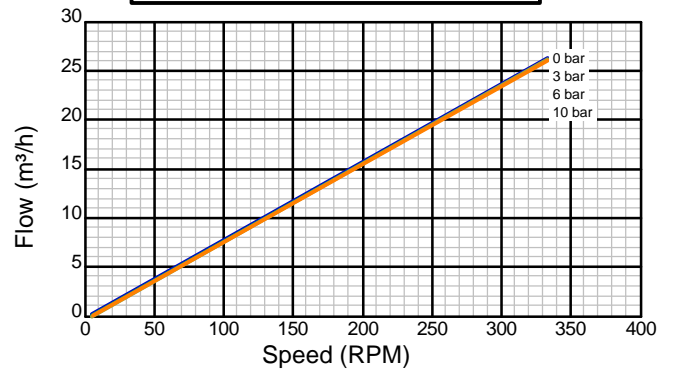

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Version 2.3.A.6

Created on  
 January 24, 2003



12500 South Pulaski Road  
 Alsip, Illinois USA 60803  
 Tel 708.389-2500 Fax 708.388-0869  
 email: tuthillpump@tuthill.com  
 www.tuthill.com

FlowPro Value Stream  
 Tuthill Pump Group  
 12500 South Pulaski Road  
 Alsip, Illinois 60803  
 USA  
 Phone: 708-389-2500  
 Fax: 708-389-4166  
 tuthillpump@tuthill.com  
 www.tuthillpump.com


### Performance Data For GG Series Pump

#### Model GG250S



Stainless Steel Construction

Standard Clearance


3" Std. Port Size

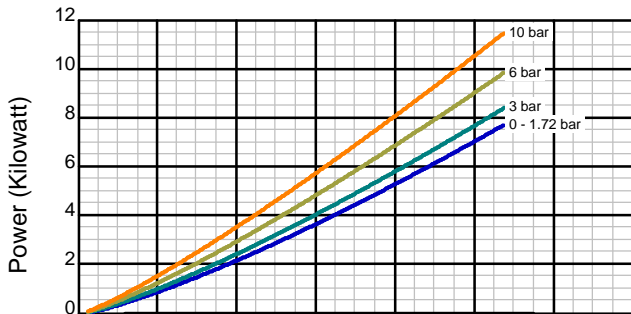

Viscosity: 50,000 cst

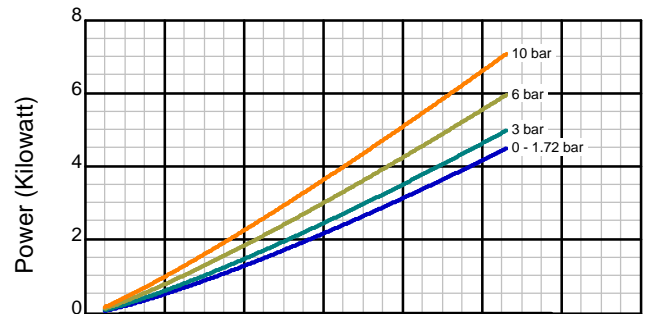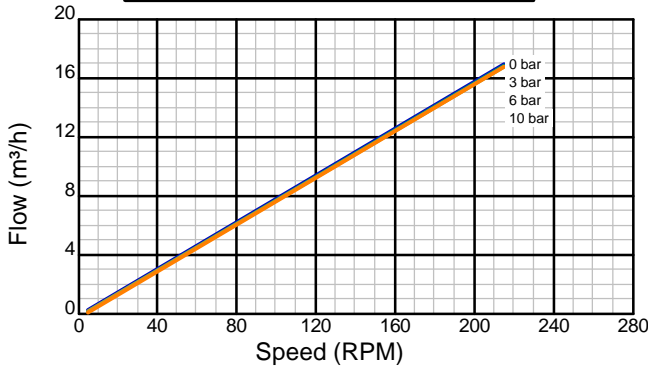

Viscosity: 150,000 cst

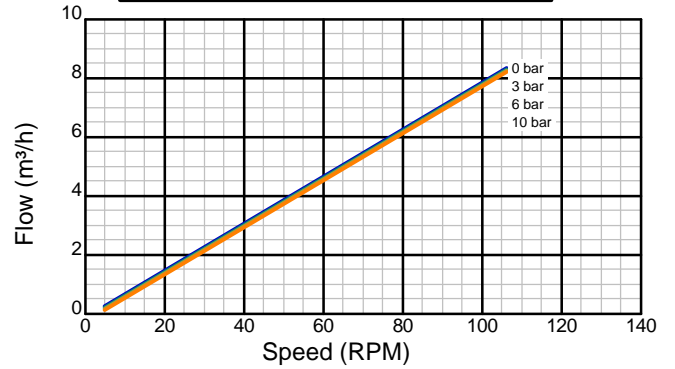

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Version 2.3.A.6  
 Created on  
 January 24, 2003