



Vertical multistage pumps (delivery over suction)

Multi 20/35N/55



20

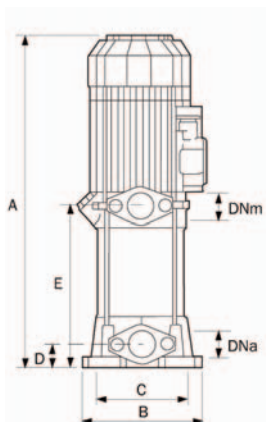

Applications

Pressurisation, irrigation and industrial use.

Materials

Pump Body

Stainless steel. AISI 304.

Suction and Discharge Ports

Cast iron.

Impellers

Stainless steel. AISI 304.

Diffusers

Glass loaded polycarbonate.

Motor Shaft

Stainless steel. AISI 420.

Mechanical Seal

Graphite and alumine.

Motor

Class F insulation.

IP 44 Protection.

Continuous operation.

Single phase version up to 2HP

Built-in thermal protection

Limitations

Maximum temperature of liquid:

35°C


Equipment

Supplied with oval counter flanges


DIN 2558.



Stainless steel impellers

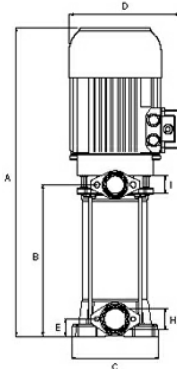

35/55



	A	B	C	D	E	F	G	DNa	DNm	Kg
Multi 20 3	398	170	125	42	182	180	204	1 1/4"	1 1/4"	14
Multi 20 4	422	170	125	42	205	180	204	1 1/4"	1 1/4"	15
Multi 20 5	441	170	125	42	225	180	204	1 1/4"	1 1/4"	16

	A	B	C	D	E	F	G	H	I	Kg
Multi 35 N 3	487	201.5	184	203	37	133	201	1 1/2"	1 1/4"	20.2/20
Multi 35 N 4	511.5	226	184	203	37	133	201	1 1/2"	1 1/4"	22.4/20.4
Multi 35 N 5	536	250.5	184	203	37	133	201	1 1/2"	1 1/4"	25.1/22.7
Multi 35 N 6	561	275	184	203	37	133	201	1 1/2"	1 1/4"	25.7
Multi 35 N 8	657.5	323	184	233	37	133	201	1 1/2"	1 1/4"	32.6
Multi 35 N 10	707.5	373	184	233	37	133	201	1 1/2"	1 1/4"	39.4

	A	B	C	D	E	F	G	H	I	Kg
Multi 55 3 N	531	245	184	203	37	133	201	1 1/2"	1 1/4"	23.3
Multi 55 3M N	571	285	184	203	37	133	201	1 1/2"	1 1/4"	25.7
Multi 55 4 N	571	285	184	203	37	133	201	1 1/2"	1 1/4"	26.6
Multi 55 6 N	696	362	184	203	37	133	201	1 1/2"	1 1/4"	35.4
Multi 55 7 N	736	402	184	203	37	133	201	1 1/2"	1 1/4"	39.7





MODEL	A			P1 (kW)		kW	HP	µF
	1~ 230 V	3~ 230 V 400 V		1~	3~			
Multi 20 3	4.5	3.2	1.9	1	0.9	0.55	0.75	16
Multi 20 4	5.8	3.9	2.3	1.2	1.1	0.75	1	16
Multi 20 5	6.4	4.2	2.5	1.4	1.3	0.9	1.25	16

230 V 50 HZ	230/400 V 50 Hz	A			P1 (kW)		kW	HP	µF
		1~ 230 V	3~ 230 V 400 V		1~	3~			
Multi 35 N 3M	Multi 35 N 3	6.7	4.5	2.6	1.5	1.4	0.75	1	25
Multi 35 N 4M	Multi 35 N 4	8.4	5.3	3.1	1.8	1.8	1.1	1.5	25
Multi 35 N 5M	Multi 35 N 5	10.2	6.9	4	2.3	2.2	1.5	2	30
	Multi 35 N 6		8.3	4.8		2.7	2	3	
	Multi 35 N 8		11.9	6.5		3.6	3	4	
	Multi 35 N 10		15.4	8.9		4.9	4	5.5	

230 V 50 HZ	230/400 V 50 Hz	A			P1 (kW)		kW	HP	µF
		1~ 230 V	3~ 230 V 400 V		1~	3~			
Multi 55 3M N	Multi 55 3 N	9.6	6.6	3.8	2.1	2.1	1.5	2	30
	Multi 55 4 N		8.3	4.8		2.8	2	3	
	Multi 55 6 N		12.1	7		4.2	3	4	
	Multi 55 7 N		15.6	9		4.9	4	5.5	

Multi 20/35N/55

Vertical multistage pumps
(delivery over suction)

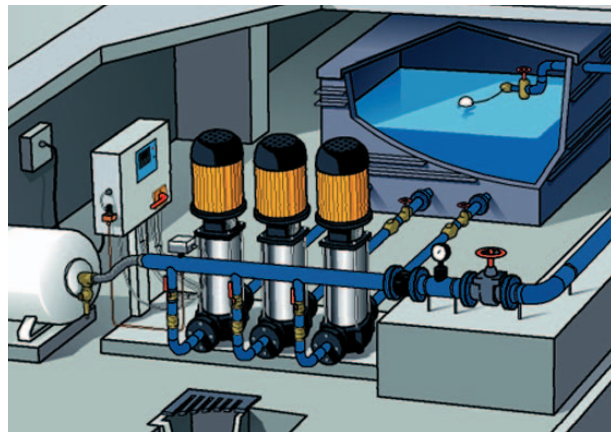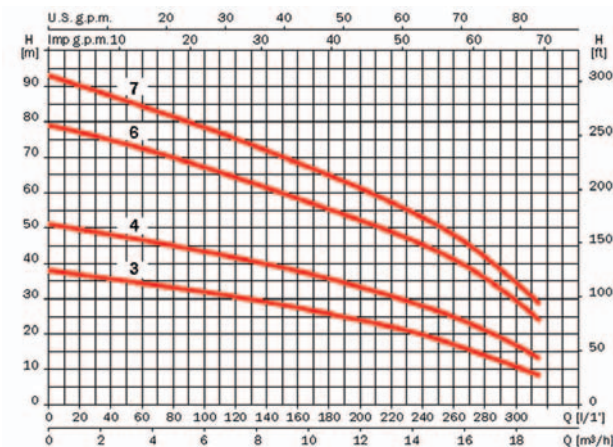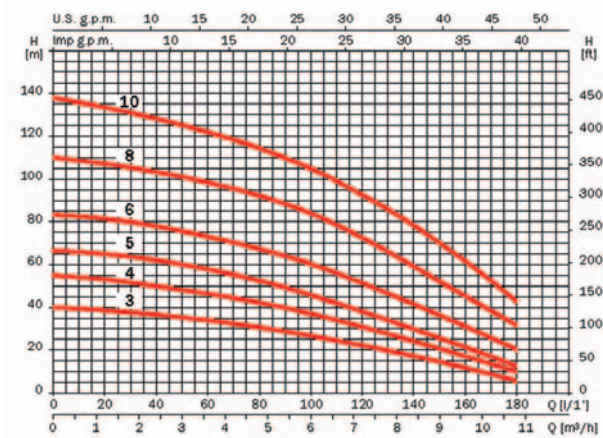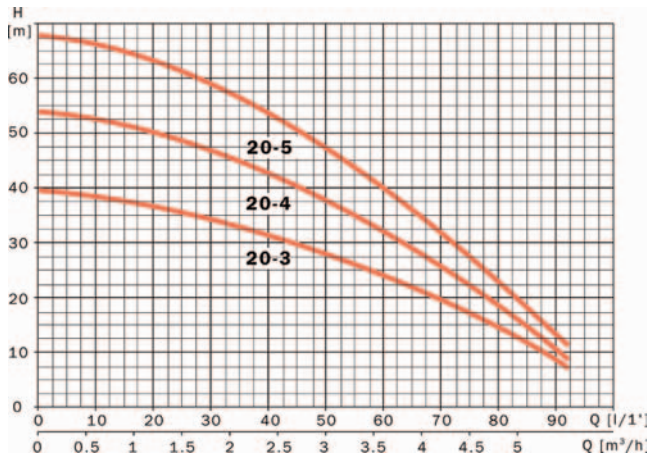

Single phase	Price	Three phase	Price	l/1'	8	17	25	33	42	58	75	92
				m³/h	0.5	1	1.5	2	2.5	3.5	4.5	5.5
Multi 20 3 M	351	Multi 20 3 T	351	H [m]	38.2	38	35.7	33.5	31	25	17	7.2
Multi 20 4 M	374	Multi 20 4 T	374		52.7	51	48.2	45.8	42	33	22	9
Multi 20 5 M	400	Multi 20 5 T	400		66.5	64	61.2	57.5	52.5	41	27	12

Single phase	Price	Three phase	Price	l/1'	17	33	50	75	100	125	150	175
				m³/h	1	2	3	4.5	6	7.5	9	10.5
Multi 35 3 MN	357	Multi 35 3 N	357		39	37.5	35.5	31.5	27	21	15	7
Multi 35 4 MN	432	Multi 35 4 N	432		54	51	48	44	37	29.5	21	11.8
Multi 35 5 MN	522	Multi 35 5 N	522		65.4	63.5	60	54.5	46	36	26.2	15
		Multi 35 6 N	549		82	79.5	76	69	61	49	36.7	23
		Multi 35 8 N	667		108	105	101	93	85	70	53	35
		Multi 35 10 N	821		134	130	125	117	105	90	70	47

Single phase	Price	Three phase	Price	l/1'	20	50	75	100	150	200	250	300
				m³/h	1.2	3	4.5	6	9	12	15	18
Multi 55 3 MN	507	Multi 55 3 N	507		37	35	33	31	28	24	18	10
		Multi 55 4 N	583		50	47	45	43	39	33	26	16
		Multi 55 6 N	683		77	73	70	66	60	52	43	29
		Multi 55 7 N	859		90	86	82	78	70	60	50	35