

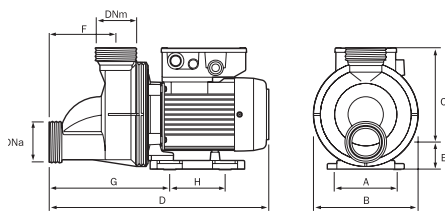
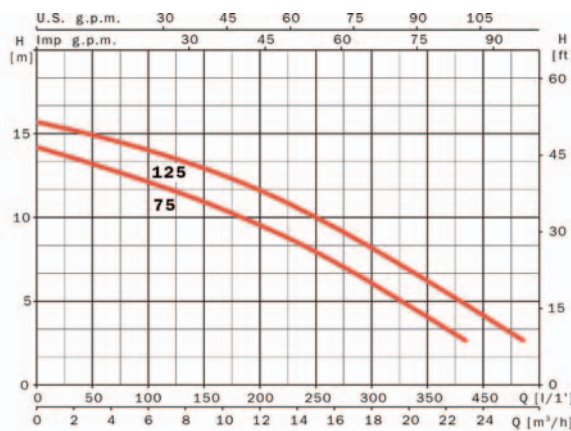


Tiper 0

Hydromassage pumps

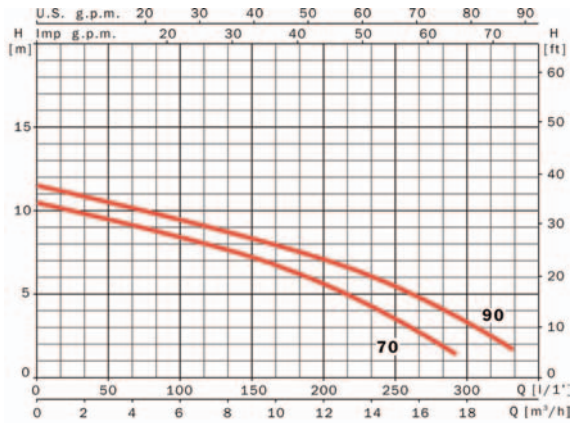

	A	B	C	D	E	F	G	H	DNa	DNm	Kg
Tiper0 70	100	102	154.5	312	47	88	130	74	2 ^{1/4} "	2 ^{1/4} "	3.9
Tiper0 90	100	101	154.5	312	47	88	130	74	2 ^{1/4} "	2 ^{1/4} "	4.4

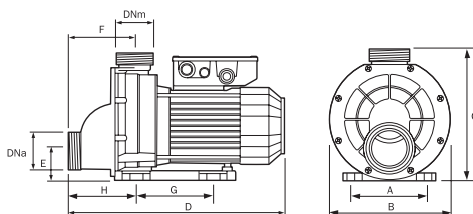

	A	B	C	D	E	F	G	H	DNa	DNm	Kg
Tiper2 75	124	187	215	378	50	120	120	130	2 ^{1/4} "	2 ^{1/4} "	8,3
Tiper2 125	124	187	215	378	50	120	120	130	2 ^{1/4} "	2 ^{1/4} "	9,4

Applications

For use with hydromassage systems.

Materials

Pump Body

Polypropylene

Impeller

Noryl

Motor Housing

Aluminium L-2521

Mechanical Seal

Graphite and Aluminium Oxide.

Motor

Insulation resistance 3750 V.

Class F Insulation.

Protection IP 55.

Continuous operation.

Built-in thermal protection.

Equipment

Complete with suction and discharge connections, metric or imperial.

Options

On/off switch rear connection and level sensors via pneumatic or electrical devices.

Variable speed MV version also available.

Single phase	Price	A		P1 (kW)		kW	HP	µF
		1~ 230 V	3~	1~	3~			
Tiper 0 70 M	210	2.9	0.64	-	0.37	0.5	12	
Tiper 0 90 M	219	3.7	0.85	-	0.75	1.0	12	

Single phase	Price	A		P1 (kW)		kW	HP	µF
		1~ 230 V	3~	1~	3~			
Tiper 2 75 M	260	5.3	1.2	-	0.55	0.75	16	
Tiper 2 125 M	285	5.6	1.5	-	0.9	1.25	16	

See our whirlpool accessories catalogue for full details