

Filterpak Base


Pump and filter package c/w flexible pipework



A filter and pump package c/w a multiport valve in the top or side position. Pump range includes the Niper, Iris or Silen models. Flow rates from 6, 8, 12, 16 m³/hr with motor powers of 0.25, 0.33, 0.5, 0.6 and 1.5hp. Filter options include 350, 450, 550 and 650mm diameter with top valve c/w semi-rigid pipework or side valve with rigid pipework.



MODEL	l/min	25	50	75	100	125	150	200
	m ³ /h	1.5	3	4.5	6	7.5	9	12
I1 33		10.2	9.7	8.6	7.2	5.2	3.2	-
I1 50		12.3	11.9	11.3	10.5	9.5	8.1	4.6
N1 25		10.3	9.8	8.8	7.2	5.3	3	-

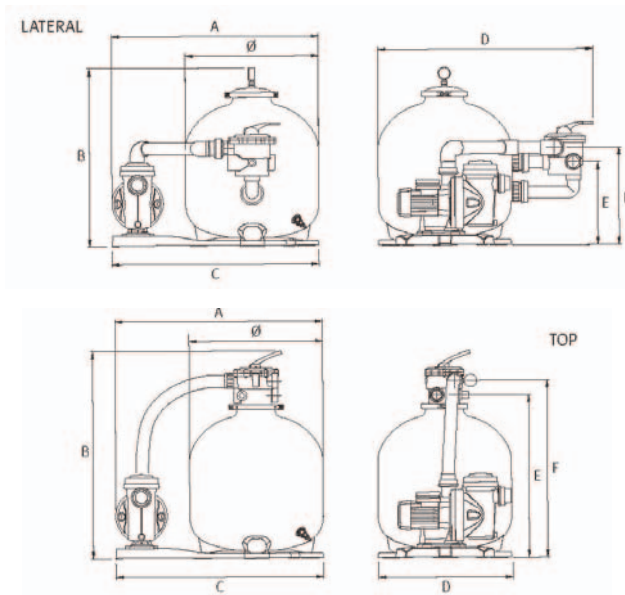

Ref	Dimensions					
	A	B	C	D	E	F
134696	647	769	613	350	585	645
134697	697	855	613	350	671	731
134698	855	855	855	550	671	763
134699	855	855	855	550	671	731
131200	902	988	855	550	824	883
134492	855	734	855	889	341	385
134493	855	734	855	889	341	385
134494	902	899	855	983	400	440

Ref	Price	Pool	Filter			Pump				Valves		Packaging
		V(*) (m ³)	ø (mm)	Flow (m ³ /h)	Sand (Kg)	Mod.	P2(HP)	A 1~	ø Asp.	Connection	Position	Weight Volume (m ³)
134696	504	48	350	6	35	N1 25	0.25	1.5	40	1 1/2"	Top	25.0/0.389
134697	563	64	450	8	75	I1 33	0.33	2.0	50	1 1/2"	Top	24.5/0.389
134698	640	96	550	12	125	I1 50	0.50	2.9	50	1 1/2"	Top	28.0/0.389
134699	708	96	550	12	125	S160	0.60	3.7	50	1 1/2"	Top	28.0/0.389
131200	946	128	650	16	235	S1 100	1.00	6.2	50	1 1/2"	Top	25.0/0.570
134492	747	96	550	12	125	I1 50	0.50	2.9	50	1 1/2"	Lateral	22.0/0.558
134493	830	96	550	12	125	S1 60	0.60	3.7	50	1 1/2"	Lateral	22.0/0.558
134494	1,058	128	650	16	235	S1 100	1.00	6.2	50	1 1/2"	Lateral	26.0/0.783